


VELTEKO

Vertical packaging
machine

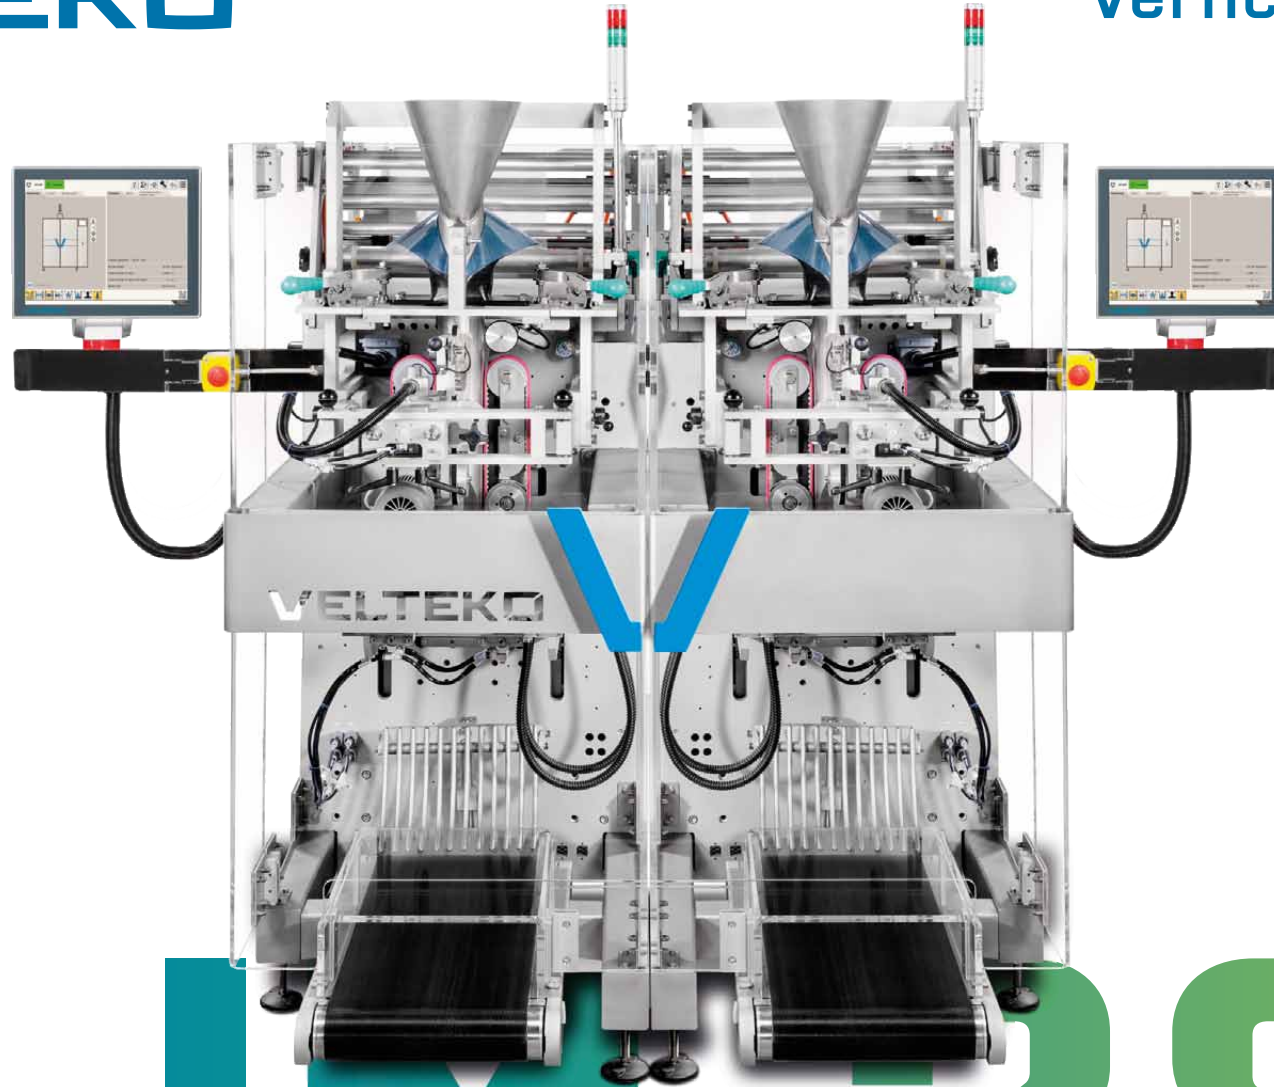

SLIM-280

IMPRESSIVELY HIGH SPEED, EXTREMELY COMPACT FOOTPRINT

Up to
200 bags/min

820 mm machine **WIDE**

**EASY
TO OPERATE
AND MAINTAIN**

**STRONG/
ROBUST,
HERMETIC
SEALS**

280 mm
max. cross
seal width

IDEAL for **WIDE**
RANGE of products



MACHINE FEATURES

- Automatic film centering
- Vacuum pulling belts
- Registration mark sensor
- Mechanic/pneumatic splicing table
- Robust stainless steel construction
- Self-diagnostics and troubleshooting

HUMAN-MACHINE INTERFACE

- Full color touch screen
- Industrial PC
- Intuitive machine setup and on-screen guide
- User presets for machine setup

DATASERVICE

- Online service support
- Online data management
- OPC dataservice available

[Learn more...](#)





STRONG/ROBUST HERMETIC SEALS AT HIGH SPEED

The compact SLIM series offers the perfect solution when it comes to packaging **small-pieced products** in **high-quality pillow bags**.


Ideal for **wide range** of products: From Confectionery to Snacks and Fragile to Liquids.



UP TO 400 BAGS/MIN

The **SLIM-TWIN** series of vertical packaging machines achieves a maximum output of up to **400 bags/min** on a **small footprint**.

PILLOW BAG + 6 modifications

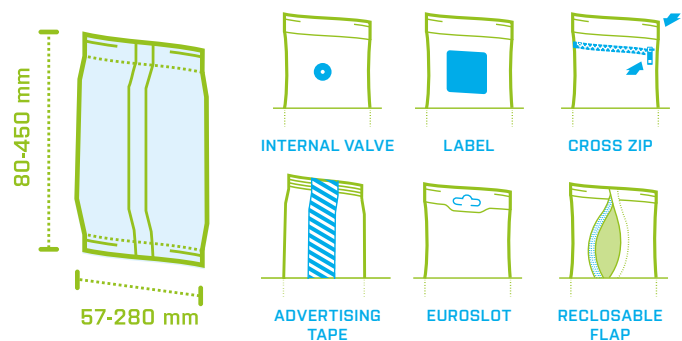

REDUCING DEMANDS ON OPERATOR SKILL

The innovative design of **VT+** (Versatile technology plus) **simplify unwinding and changing of lead foil format**. It reduces demands on the skill of the operator and the time required for machine changeovers.

VELTEKO Philosophy


Provide customers around the world with a wide range of versatile and specialized vertical packaging solutions tailored to their individual needs.

Advanced Engineering, Design and Construction



Extreme reliability and an extra long service life are a direct result of VELTEKO's cutting edge engineering and design, combined with precise manufacturing in the Czech Republic using the highest quality materials and branded components.

We supply complete packaging systems

- ▣ *Upstream and downstream systems*
- ▣ *Custom project engineering*
- ▣ *Technical and engineering support throughout the packaging system's life cycle*

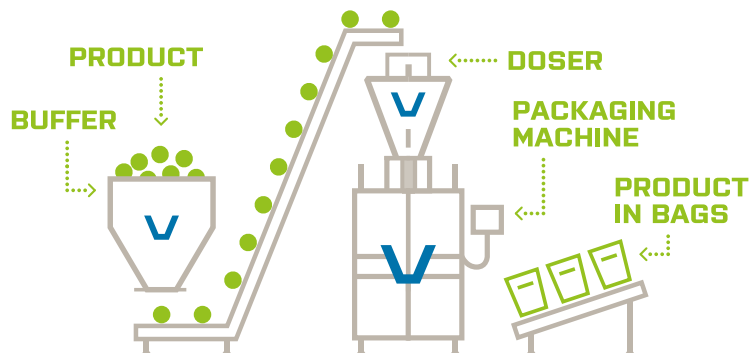

Technical parameters

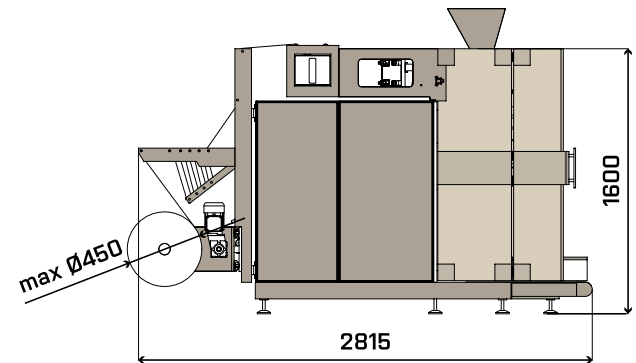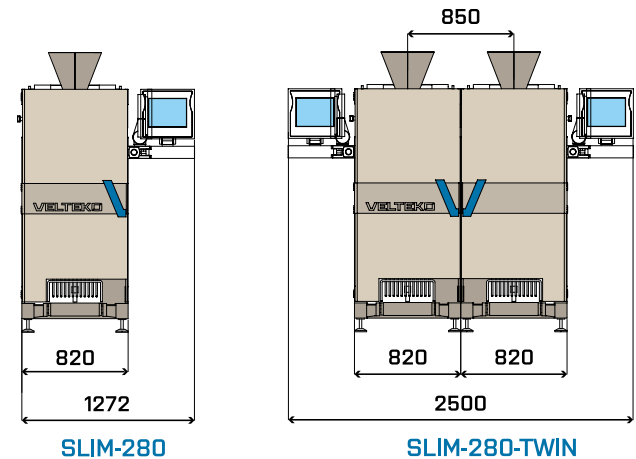


	SLIM-280	SLIM-280-TWIN
Operating mode	Continuous	Continuous
Speed	200 pillow bags/min	400 pillow bags/min
Max. dimension of cross seal	280 mm	280 mm
Protection	IP54	IP54
Construction materials	Stainless steel	Stainless steel

Contacts

VELTEKO CZ s.r.o.
K Borovickam 1716
258 01 Vlasim
Czech Republic
Tel. +420 317 846 473
velteko@velteko.cz

VELTEKO POLSKA Sp. z o. o.
Ul. Sw. Michala 43
61-119 Poznań
Polska
Tel. + 48 61 650 34 07
velteko@velteko.pl

GLOBAL SALES NETWORK

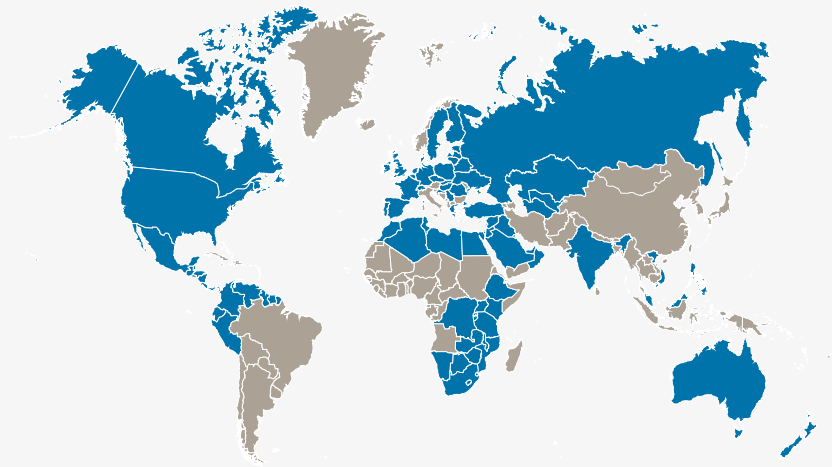

REGIONS COVERED BY VELTEKO DISTRIBUTORS

Your VELTEKO Distributor



www.velteko.com

The contents of this catalog are not an offer for a contract, a promise to conclude a contract nor any legal proceedings by VELTEKO s.r.o. regardless of its content or denominations. VELTEKO s.r.o. reserves the right to change the specifications of machines that are illustrated and described in this catalog. Photos of machines are for informational purposes only and may contain optional accessories. Please contact your local distributor to receive an offer that is tailored to your requirements.

More from our portfolio

Co-funded by
the European Union

04/2024 v1.0

VERSATILE-360

- One machine for 10 bag types
- 16 modifications to extend bag functionality
- Maximum flexibility, your safe choice
- Extremely compact machine footprint
- Leading cost-effective DDYPACK production
- 200 bags/min maximum speed
- 5 - 45 min. changeover to different bag type



DOSING DEVICES

- Complex range of dosing devices and weighers for a wide range of food and non-food products
- Volumetric friction, volumetric flap and auger filler dosers
- Vibratory and belt dosing weighers



VELTEKO – The vertical packaging machine experts